
4 2

BOILER DATA
OPERATING VOLUME (USG) 680
OPERATING WEIGHT (LBS) 13600
HEAT IMPUT (MBH) 2860
OUTPUT (HP) 70

VENT FLANGE DIMENSIONS			
OD	20-1/8		
ID	16		
B.C.D.	18.5		
NO. OF HOLES	8		
HOLE DIAMETER	1/2		

CONNECTION SCHEDULE					
TAG	DESCRIPTION	CONNECTION			
		SIZE (INCH)	TYPE	RATTING	
Α	CONTROLS	1-1/4	FULL COUPLING	3000#	
В	STEAM OUTLETS	8	SORF FLANGE	150#	
С	SURFACE BLOWDOWN	3	FULL COUPLING	3000#	
D	MANHOLE	12X16	ELLIPTICAL		
E	SAFETY RELIEF VALVE	2-1/2	FULL COUPLING	3000#	
F	REVERSING CHAMBER WASHOUT	3	FULL COUPLING	3000#	
G	CONDENSATE INLET	3	SORF FLANGE	150#	
Н	WASHOUTS	3	FULL COUPLING	3000#	
J	REAR DOOR	20			
K	LOW FIRE HOLD	3/4	FULL COUPLING	3000#	
L	FURNACE INSPECTION	3	FULL COUPLING	3000#	
M	TUBE PULL	120			

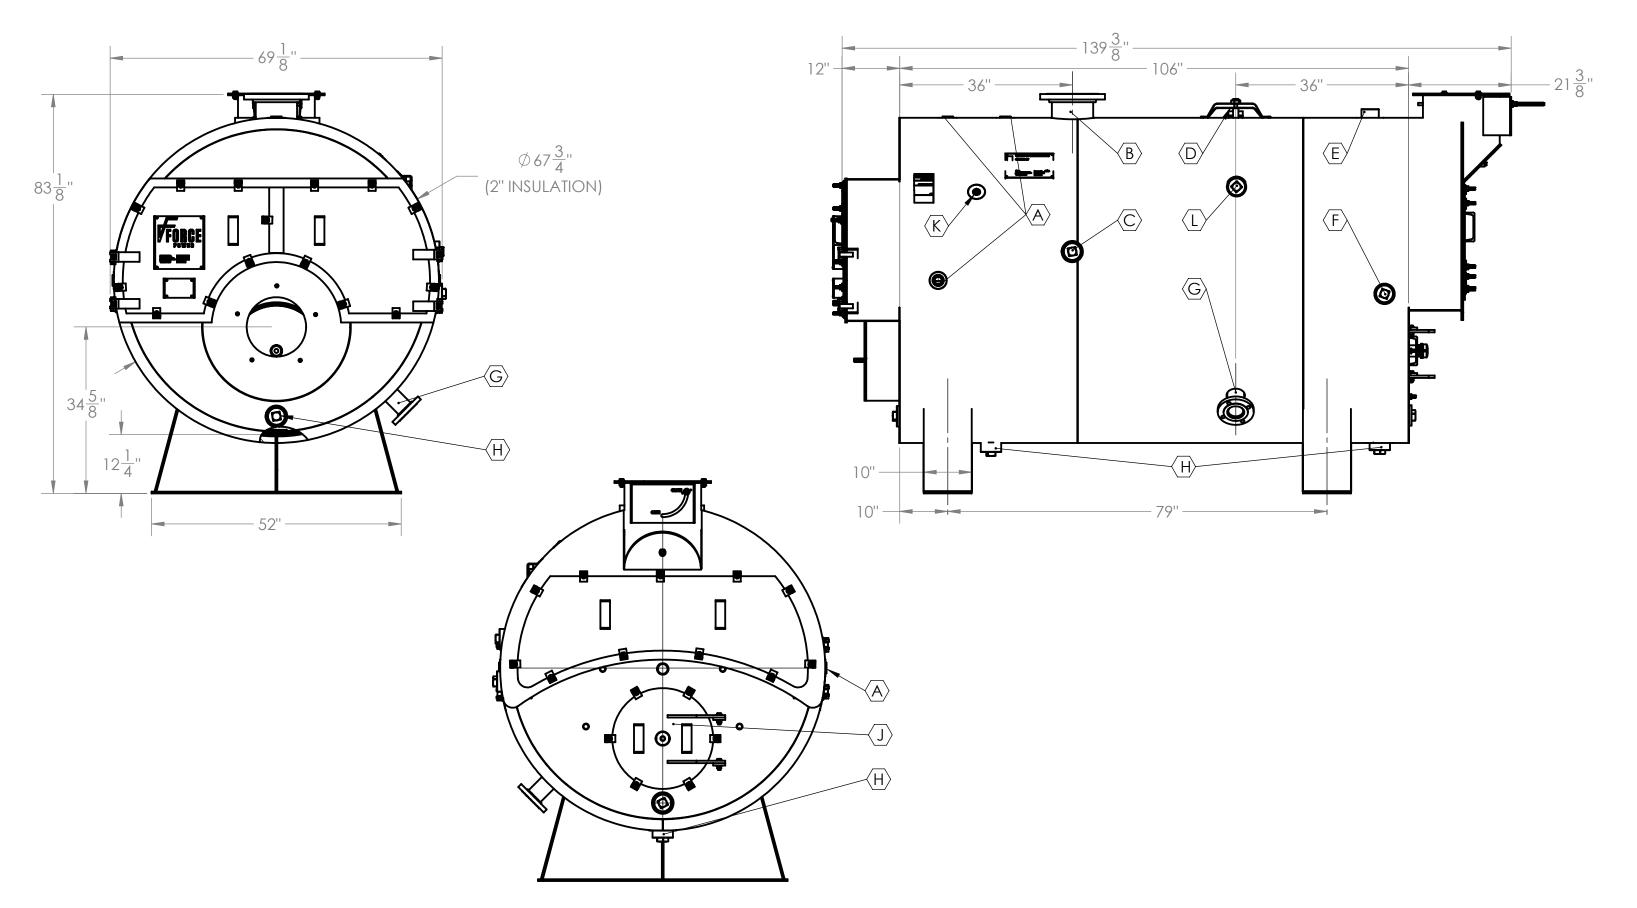

1. ADEQUATE BOIL OUT PROCEDURES MUST BE IMPLEMENTED BEFORE BOILER PLACED IN SERVICE (SEE OPERATION MANUAL).

2. PROPER WATER TREATMENT PROGRAM IS CRITICAL TO THE OPERATION OF THIS BOILER.

3. WARRANTIES, EXPRESSED OR IMPLIED, WILL BE RENDERED NULL AND VOID IF PROPER WATER TREATMENT PROGRAM IS NOT IMPLEMENTED AND MAINTAINED. CONSULT LOCAL WATER TREATMENT SPECIALISTS FOR DESIGN AND SUPPLY OF REQUIRED WATER TREATMENT SYSTEM

4. ALL DIMENSIONS FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED: DATE FORCE Niskayuna, NY, 12309, USA
PH (518) 377-2349, FAX (518 DIMENSIONS ARE IN INCHES SR 12/2/2016 PH. (518) 377-2349, FAX (518) 344-7495 DRAWN TOLERANCES: CHECKED ANGULAR: ±5° TCS70LS(XL) Boiler ASSY, 3P-R-FE .XX: ± .010" .XXX: ± .005" ENG APPR. MFG APPR. PROPRIETARY AND CONFIDENTIAL FRACTIONS: ± 1/16" INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y14.5 THE INFORMATION CONTAINED IN THIS COMMENTS: DRAWING IS THE SOLE PROPERTY OF MATERIAL SEE NOTE 1 SIZE DWG. NO. **FORCE POWER.** ANY REPRODUCTION **C** 5007221200 IN PART OR AS A WHOLE WITHOUT SEE NOTE 3 THE WRITTEN PERMISSION OF SCALE: 1:48 WEIGHT: 7410.7325SHEET 1 OF 1 FORCE POWER IS PROHIBITED. APPLICATION DO NOT SCALE DRAWING

3

2

1

ı